

## SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

### 3A SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

#### FEATURES:


- Glass Passivated Chip Junction
- Reverse Voltage - 100 to 1000 V
- Forward Current - 3.0 A
- Fast reverse recovery time
- Designed for Surface Mount Application

#### MECHANICAL DATA

- Case: UMSB
- Terminals: Solderable per MIL-STD-750, Method 2026

#### PINNING

| PIN | DESCRIPTION          |
|-----|----------------------|
| 1   | Output Anode ( + )   |
| 2   | Output Cathode ( - ) |
| 3   | Input Pin ( ~ )      |
| 4   | Input Pin ( ~ )      |

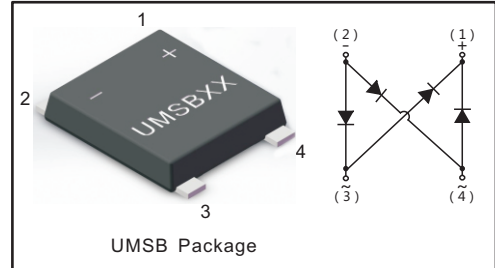

#### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.


| Parameter   | Symbols         | FMSB30B    | FMSB30D | FMSB30G | FMSB30J | FMSB30K | FMSB30M | Units              |
|---|-----------------|------------|---------|---------|---------|---------|---------|--------------------|
| Maximum Repetitive Peak Reverse Voltage   | $V_{RRM}$       | 100        | 200     | 400     | 600     | 800     | 1000    | V                  |
| Maximum RMS voltage   | $V_{RMS}$       | 70         | 140     | 280     | 420     | 560     | 700     | V                  |
| Maximum DC Blocking Voltage   | $V_{DC}$        | 100        | 200     | 400     | 600     | 800     | 1000    | V                  |
| Average Rectified Output Current at $T_c = 115\text{ }^\circ\text{C}$   | $I_O$           | 3.0        |         |         |         |         |         | A                  |
| Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)                             | $I_{FSM}$       | 80         |         |         |         |         |         | A                  |
| Maximum Forward Voltage at 3.0 A  | $V_F$           | 1.3        |         |         |         |         |         | V                  |
| Maximum DC Reverse Current $T_a = 25\text{ }^\circ\text{C}$<br>at Rated DC Blocking Voltage $T_a = 125\text{ }^\circ\text{C}$ | $I_R$           | 5.0<br>200 |         |         |         |         |         | $\mu\text{A}$      |
| Typical Junction Capacitance ( Note1 )  | $C_j$           | 40         |         |         |         |         |         | pF                 |
| Typical Thermal Resistance ( Note2 )  | $R_{\theta JA}$ | 30         |         |         |         |         |         | $^\circ\text{C/W}$ |
| Maximum Reverse Recovery Time ( Note3 )   | $t_{rr}$        | 150        |         |         | 250     | 500     |         | ns                 |
| Operating and Storage Temperature Range   | $T_j, T_{stg}$  | -55 ~ +150 |         |         |         |         |         | $^\circ\text{C}$   |

Note:1. Measured at 1 MHz and applied reverse voltage of 4 V D.C


2. Mounted on glass epoxy PC board with 4×1.5"×1.5" ( 3.81×3.81 cm ) copper pad.

3. Measured with  $I_F = 0.5\text{ A}$ ,  $I_R = 1\text{ A}$ ,  $I_{rr} = 0.25\text{ A}$ .


**Fig.1 Average Rectified Output Current Derating Curve**

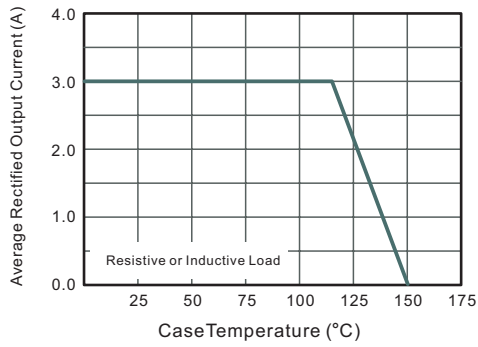


**Fig.2 Typical Reverse Characteristics**

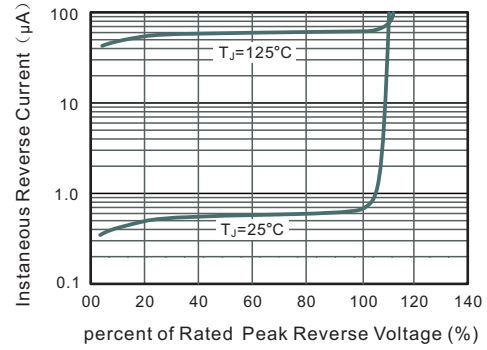


**Fig.3 Typical Instantaneous Forward Characteristics**

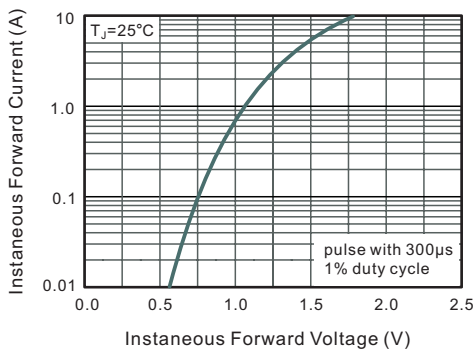

**Fig.4 Typical Junction Capacitance**

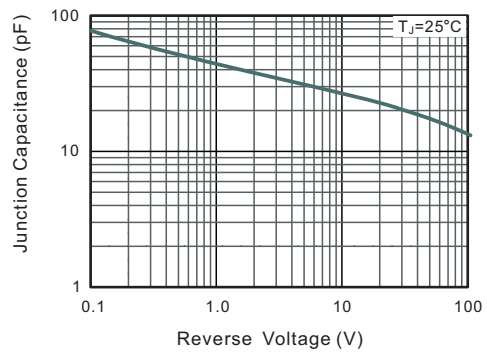


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

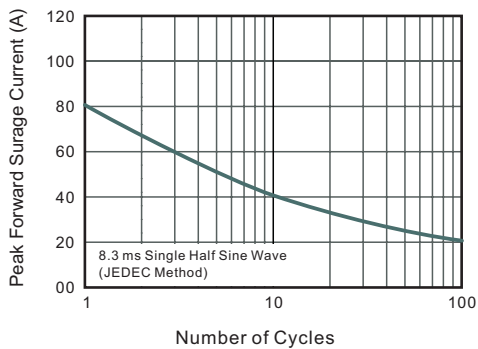

### PACKAGE OUTLINE

Plastic surface mounted package; 4 leads

UMSB

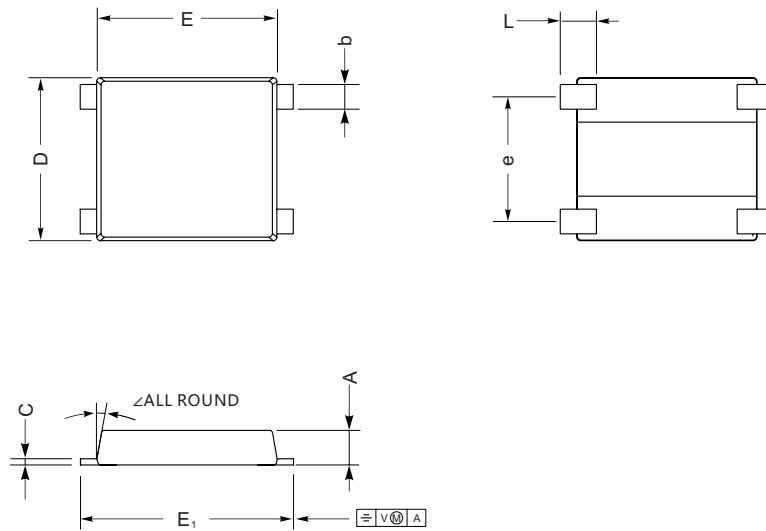

M2 mechanical data

| UNIT |     | A   | C    | D   | E   | E <sub>1</sub> | L    | e   | b    | ∠   |
|------|-----|-----|------|-----|-----|----------------|------|-----|------|-----|
| mm   | max | 1.5 | 0.29 | 7.0 | 7.6 | 8.9            | 1.6  | 5.3 | 1.15 | 10° |
|      | min | 1.3 | 0.17 | 6.2 | 7.1 | 8.4            | 1.0  | 4.9 | 0.95 |     |
| mil  | max | 59  | 12   | 276 | 299 | 350            | 55   | 209 | 45   |     |
|      | min | 51  | 7    | 244 | 280 | 331            | 31.5 | 193 | 37   |     |

### Marking

| Type number | Marking code |
|-------------|--------------|
| FMSB30B     | FMB30B       |
| FMSB30D     | FMB30D       |
| FMSB30G     | FMB30G       |
| FMSB30J     | FMB30J       |
| FMSB30K     | FMB30K       |
| FMSB30M     | FMB30M       |