

**Surface Mount General Purpose Silicon Rectifiers**
**Surface Mount General Purpose Silicon Rectifiers**
**Reverse Voltage - 50 to 1000 V**
**Forward Current - 3 A**
**FEATURES**


- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Lead free in comply with EU RoHS 2011/65/EU directives

**MECHANICAL DATA**

- Case: SMBF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 57mg / 0.002oz

**PINNING**

PIN	DESCRIPTION
1	Cathode
2	Anode



Top View

Marking Code : S3AB-S3MB

Simplified outline SMBF and symbol

**Maximum Ratings and Electrical characteristics**

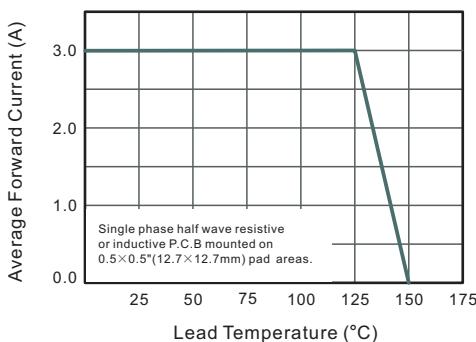
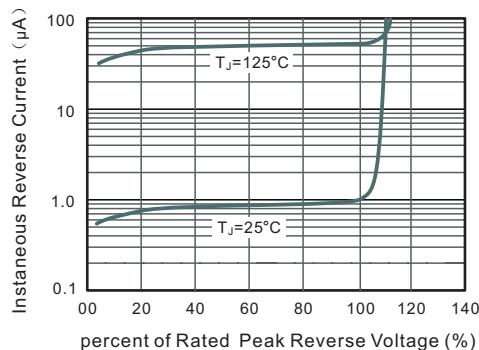
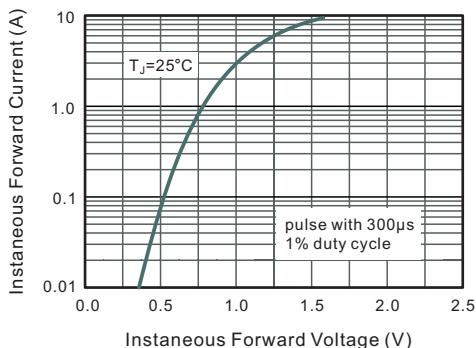
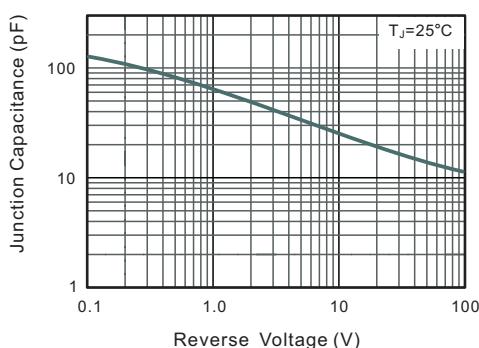
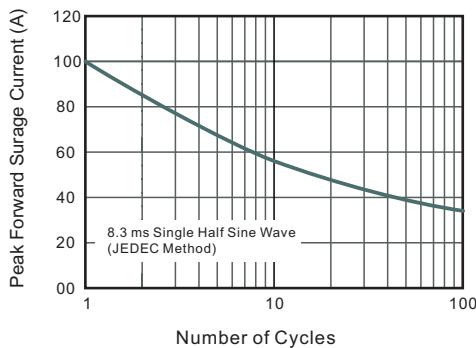
Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	S3ABF	S3BBF	S3DBF	S3GBF	S3JBF	S3KBF	S3MBF	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at $T_a = 65^{\circ}\text{C}$	$I_{F(AV)}$	3							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	100							A
Maximum Instantaneous Forward Voltage at 3 A	$V_F$	1.1							V
Maximum DC Reverse Current $T_a = 25^{\circ}\text{C}$ at Rated DC Blocking Voltage $T_a = 125^{\circ}\text{C}$	$I_R$	5 200							$\mu\text{A}$
Typical Junction Capacitance <sup>1)</sup>	$C_j$	45							pF
Typical Thermal Resistance <sup>2)</sup>	$R_{\theta JA}$	40							$^{\circ}\text{C/W}$
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150							$^{\circ}\text{C}$

1 ) Measured at 1 MHz and applied reverse voltage of 4 V D.C

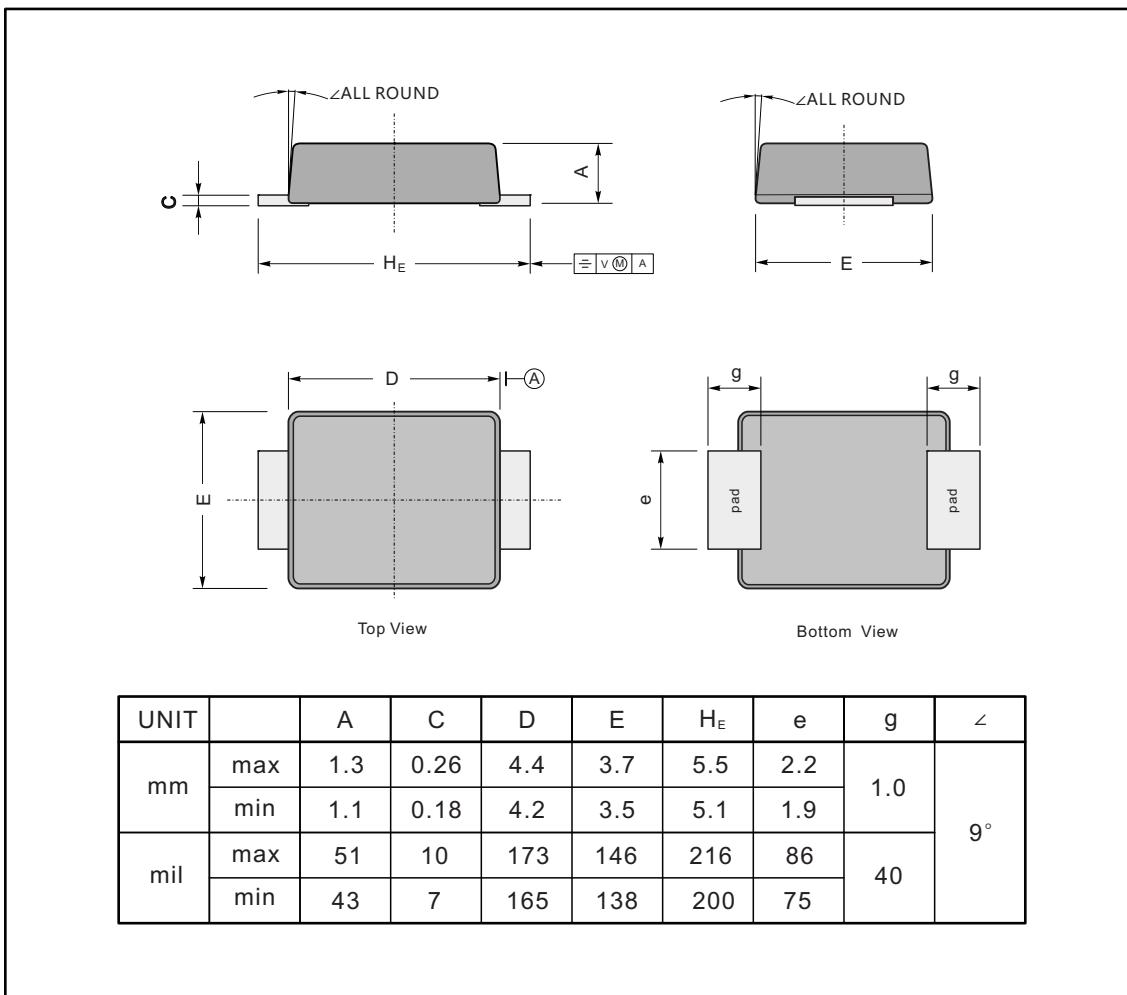
2 ) P.C.B. mounted with 0.5 X 0.5" (12.7 X 12.7 mm) copper pad areas.

**Fig.1 Forward Current Derating Curve**

**Fig.2 Typical Reverse Characteristics**

**Fig.3 Typical Instantaneous Forward Characteristics**

**Fig.4 Typical Junction Capacitance**

**Fig.6 Maximum Non-Repetitive Peak Forward Surge Current**


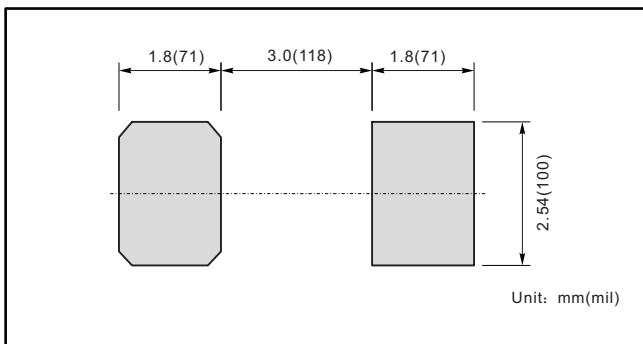
### PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

**SMBF**



### The recommended mounting pad size



### Marking

Type number	Marking code
S3ABF	S3AB
S3BBF	S3BB
S3DBF	S3DB
S3GBF	S3GB
S3JBF	S3JB
S3KBF	S3KB
S3MBF	S3MB